


CABLE FIBRA OPTICA TRIMERX INT/EXT LOOSE TUBE LSZH GJFXZY

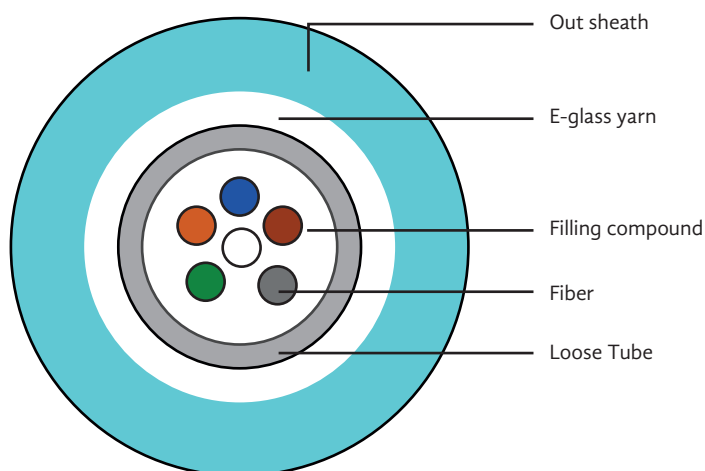

CHARACTERISTICS

- Filler protect tube fiber.
- E-glass member potentiate.
- Fiber Counl:2~12 cores.

APPLICATIONS

- Adopted to indoor or outdoor distribution.
- Small cable size light weight
- With excellent waterproofing performance.

TECHNICAL PARAMETERS

| CABLE COUNT | OUT SHEATH DIAMETER (MM) | WEIGHT (KG) | MINIMUM ALLOWED TENSILE STRENGTH (N) | | MINIMUM ALLOWABLE CRUSH LOAD (N/100 MM) | | MINIMUM BENDING RADIUS (MM) | | STORAGE TEMPERATURE (°C) |
|-------------|--------------------------|-------------|--------------------------------------|-----------|---|-----------|-----------------------------|-----------|--------------------------|
| | | | SHORT TERM | LONG TERM | SHORT TERM | LONG TERM | SHORT TERM | LONG TERM | |
| 2 | 6.0 | 45.00 | 600 | 200 | 1000 | 200 | 20D | 10D | -20+60 |
| 4 | 6.0 | 45.00 | 600 | 200 | 1000 | 200 | 20D | 10D | -20+60 |
| 6 | 6.0 | 45.00 | 600 | 200 | 1000 | 200 | 20D | 10D | -20+60 |
| 8 | 6.0 | 45.00 | 600 | 200 | 1000 | 200 | 20D | 10D | -20+60 |
| 10 | 6.0 | 45.00 | 600 | 200 | 1000 | 200 | 20D | 10D | -20+60 |
| 12 | 6.0 | 45.00 | 600 | 200 | 1000 | 200 | 20D | 10D | -20+60 |

OPTICAL CHARACTERISTICS

| FIBER SORT | MULTIMODE | G.651 | A1a:50/125 | Graded - index fiber |
|------------|------------|--------------------|------------|---|
| | | | | |
| | SINGLEMODE | G.652 (A, B, C, D) | | B1.1 Conventional fiber |
| | | G.653 | | B2: Zero dispersion shifted |
| | | G.654 | | B1.2: Cut-off wavelength shifted |
| | | G.655 | | B4: Main Technical data for positive dispersion shifted single mode fiber |

ORDEN DE PEDIDO

| CÓDIGO | DESCRIPCIÓN |
|--------------|---|
| TXFOCACE3171 | TX CABLE FO MM 6F OM3 INT/EXT LSZH AQUA GJFXZY |
| TXFOCACE3172 | TX CABLE FO MM 12F OM3 INT/EXT LSZH AQUA GJFXZY |
| TXFOCACE3121 | TX CABLE FO MM 6F INT/EXT LSZH ORANGE GJFXZY |
| TXFOCACE3361 | TX CABLE FO SM 6F INT/EXT AMARILLO LSZH GJFXZY |