

Cable UTP Cat. 5e

25 AWG BLANCO 305 MTS 100% COBRE

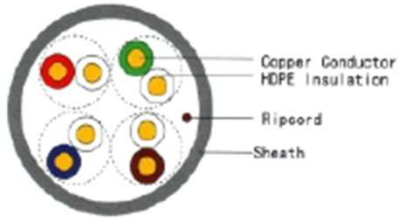


CÓDIGO
P05989

Reference standard: ANSI/TIA-568-C.2, ISO / IEC 11801

Rated temperature range:0-60°C

Technical Specifications

Structure	Construction	U/UTP	
	Number of pairs	4Pairs	
Conductor	AWG	25AWG	
	Material	CU	
	Conductor dimension (mm)	0.45±0.008	
Insulation	Insulation Material	HDPE	
	Insulation dimension(mm)	0.82±0.1	
Pairs	1	White & Brown/Brown	
	2	White & Blue/Blue	
	3	White & Orange/Orange	
	4	White & Green/Green	
Binder	Binder material	NA	
Shield	Individual shield &material	NA	
	Primary overall shield &material	NA	
	Secondary overall shield & material	NA	
	shield coverage	NA	
	Drain wrie	NA	
Outer jacket	Outer jacket material	PVC	
	Thickness(mm)	0.50±0.05	
	Overall dimension(mm)	4.8±0.35	
	Outer jacket color	Black or White	
	Rip cord	Yes	
Packing	305M/Cardboard Box		
Marking	According to customer requirements		
Fluke Test: Pass 80 meters Permanent Link			