


# DRX™ 125

thermal magnetic MCCBs from 15 to 125 A

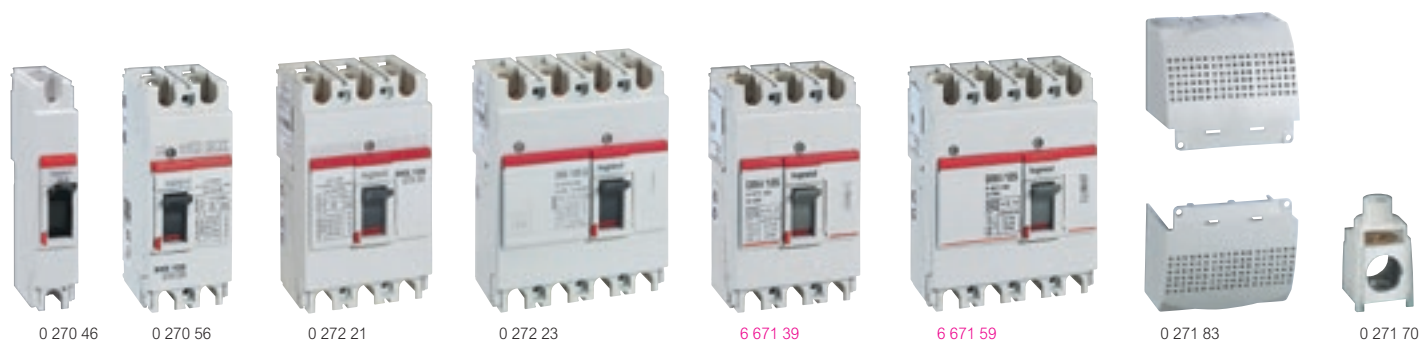

Technical characteristics and curves **p. 128**  
 Dimensions and installation principle **see e-catalogue**

For switching, control, isolation and protection of low-voltage electrical lines  
 Can be fitted with auxiliaries (p. 129)

- Supplied with:
- M5 terminal for  $I_n \leq 50$  A and M8 range for  $I_n > 50$  A
  - Fixing screws
  - Insulating shields (2 for 3P and 3 for 4P)

Fixed thermal and magnetic  
 Conform to IEC 60947-2, in compliance with NEMA

Pack	Cat.Nos		DRX 125
			<b>Breaking capacity Icu 10 kA (415 V<math>\sim</math>)</b>
	3P	4P	$I_n$
1	0 270 00	0 270 10	15 A
1	0 270 01	0 270 11	20 A
1	0 270 02	0 270 12	25 A
1	0 270 03	0 270 13	30 A
1	0 270 04	0 270 14	40 A
1	0 270 05	0 270 15	50 A
1	0 270 06	0 270 16	60 A
1	0 270 39	0 270 29	63 A
1	0 270 07	0 270 17	75 A
1	0 272 55	0 272 56	80 A
1	0 270 08	0 270 18	100 A
1	0 270 09	0 270 19	125 A
			<b>Breaking capacity Icu 20 kA (415 V<math>\sim</math>)</b>
			$I_n$
1	0 270 20	0 270 30	15 A
1	0 270 21	0 270 31	20 A
1	0 270 22	0 270 32	25 A
1	0 270 23	0 270 33	30 A
1	0 270 24	0 270 34	40 A
1	0 270 25	0 270 35	50 A
1	0 270 26	0 270 36	60 A
1	0 272 20	0 272 22	63 A
1	0 270 27	0 270 37	75 A
1	0 272 57	0 272 58	80 A
1	0 270 28	0 270 38	100 A
1	0 272 21	0 272 23	125 A
			<b>Breaking capacity Icu 25 kA (220/240 V<math>\sim</math>)</b>
			$I_n$
1	1P		15 A
1	0 270 40		20 A
1	0 270 41		25 A
1	0 270 42		30 A
1	0 270 43		40 A
1	0 270 44		50 A
1	0 270 45		60 A
1	0 270 46		75 A
1	0 270 47		100 A
1	0 270 48		125 A
			<b>Breaking capacity Icu 36 kA (415 V<math>\sim</math>)</b>
			$I_n$
1	2P		15 A
1	0 270 50		20 A
1	0 270 51		25 A
1	0 270 52		30 A
1	0 270 53		40 A
1	0 270 54		50 A
1	0 270 55		60 A
1	0 270 56		75 A
1	0 270 57		100 A
1	0 270 58		125 A

Pack	Cat.Nos		DRX-I 125
1	<b>N</b> 6 671 39   6 671 59		Trip-free switches for on-load circuit breaking and isolation of low voltage electrical circuits 125 A
20 12 6	0 271 89 0 271 90 0 271 87		<b>Mounting on rail</b> Plates for fixing DRX 125 on DIN rail For 1P For 2P For 3P and 4P
1	0 271 76		<b>Rotary handles</b> <b>Direct on DRX</b> Standard (grey)
1	0 271 77		<b>Vari-depth handle</b> Comprising: connecting rod, bracket, drilling template, mounting accessories, door locking mechanism Standard (grey)
1	0 271 81		<b>Connection accessories</b> <b>Insulating shields</b> Used to isolate the connection between each pole Set of 2 Set of 3
1	0 271 82		<b>Sealable terminal shields</b> Set of 2
1	0 271 91		<b>Cage terminals</b> Up to 50 A (inclusive) From 60 to 100 A For 125 A
1	0 271 83   0 271 84		Set of 2
1	0 271 70   0 271 72		Set of 60 pieces up to 50 A (inclusive)
1	0 271 71   0 271 73		Set of 60 pieces from 60 to 100 A
1	0 272 52   0 272 53		Set of 60 pieces 125 A
1	0 271 92		
1	0 271 93		
1	0 272 54		
1	0 271 80		<b>Padlock for DRX 125 and 250</b> For locking on "OFF" position (up to 3 locks)

Dimensions  
 see e-catalogue

