


## Atlas-X1™ Cat 6 U/UTP Cable, LSZH

### PART NUMBERS

Description	Part No.
Atlas-X1 Cat 6 U/UTP Cable, Low-Smoke Zero Halogen, blue, 305-meter reel in box	100-UTP6Z-MLB
Atlas-X1 Cat 6 U/UTP Cable, Low-Smoke Zero Halogen, grey, 305-meter reel in box	101-UTP6Z-MSB
Atlas-X1 Cat 6 U/UTP Cable, Low-Smoke Zero Halogen, blue, 305-meter spool	102-UTP6Z-MLS
Atlas-X1 Cat 6 U/UTP Cable, Low-Smoke Zero Halogen, grey, 305-meter spool	103-UTP6Z-MSS
Atlas-X1 Cat 6 U/UTP Cable, Low-Smoke Zero Halogen, white, 305-meter reel in box	104-UTP6Z-MWB

### APPLICATION

IEEE 802.3: 1000BASE-T; 100BASE-T; 10BASE-T

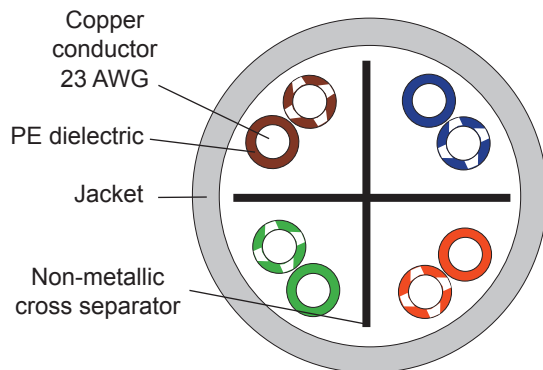

### STANDARDS COMPLIANCE

ANSI/TIA-568-C.2 Cat 6  
 ISO/IEC 11801 Class E  
 ISO/IEC 15018: 2004  
 IEC 61156-1  
 IEC 61156-5  
 EN50173  
 RoHS Compliant

### FIRE RATING

IEC 60332-1-2 (vertical flame test)  
 IEC 60754-1  
 IEC 60754-2  
 IEC 61034-2

### COUNTRY OF ORIGIN

Taiwan

Construction		
Conductor	Bare copper wire	23 AWG
Insulation	Polyethylene	Ø 0.99 mm
Twisting	4 twisted pairs, 2 single conductors paired Twisted pair color code: 1: Blue+White/Blue      2: Orange+White/Orange 3: Green+White/Green    4: Brown+White/Brown	
Cable lay-up	4 pairs with different pitches	
Outer jacket	LSZH	
Outer diameter	Ø 6.0 mm (.236")	

<b>Leviton Network Solutions</b> 2222 - 222nd St. SE Bothell, WA 98021-4416  tel 1-800-824-3005 tel +1-425-486-2222 appeng@leviton.com www.leviton.com	<b>Asia / Pacific</b> T +1.631.812.6228 E infoasean@leviton.com	<b>Canada</b> T +1.514.954.1840 E pcservice@leviton.com	<b>Caribbean</b> T +1.954.593.1896 E infocaribbean@leviton.com	<b>China</b> T +852.2774.9876 E infochina@leviton.com	<b>Colombia</b> T +57.1.743.6045 E infocolombia@leviton.com
	<b>Europe</b> T +33.6.8869.1380 E infoeurope@leviton.com	<b>India / SAARC</b> T +971.4.886.4722 E infoindia@leviton.com	<b>Mexico</b> T +52.55.5082.1040 E lsamarketing@leviton.com	<b>Middle East &amp; Africa</b> T +971.4.886.4722 E lmeinfo@leviton.com	<b>South Korea</b> T +82.2.3273.9963 E infokorea@leviton.com

<b>TECHNICAL SPECIFICATIONS</b>	
<b>Mechanical Properties</b>	
Bending Radius	≥ 4 x OD without load
Temperature range	during operation: -20° C ~ 60° C during installation: 0° C ~ 50° C
<b>Electrical Properties (-20° C ± 5° C)</b>	
DC resistance	Max. 8.9 Ω/100 m at 20° C
Resistance unbalance	Max. 2% at 20° C
Insulation resistance (500V)	Min. 5000 MΩ/Km at 20° C
Mutual capacitance	Nom. 5.1 nf/100 m at 1kHz
Capacitance unbalance (pair to ground)	Max. 160 pf/100 m at 1kHz
Characteristic impedance (1 - 100MHz)	(100 ± 15) Ω
Nominal velocity of propagation	67%
Test voltage (DC, 1 min.)	1 kV/1 min.
Delay Skew	45 ns/100 m Max.

<b>Transmission characteristics acc. to ANSI/TIA-568-C.2 Cat 6 (20° C)</b>							
Freq. (MHz)	Attenuation (dB) max.	NEXT (dB) min.	PS-NEXT (dB) min.	ELFEXT (dB) min.	PS-ELFEXT (dB) min.	Return Loss (dB) min.	Propagation Delay (ns/100m) max.
1	2.0	74.3	72.3	67.8	64.8	20.0	570.0
4	3.8	65.3	63.3	55.8	52.8	23.0	552.0
10	6.0	59.3	57.3	47.8	44.8	25.0	545.4
16	7.6	56.3	54.3	43.7	40.7	25.0	543.0
20	8.5	54.8	52.8	41.8	38.8	25.0	542.0
31.25	10.7	51.9	49.9	37.9	34.9	23.6	540.4
62.5	15.4	47.4	45.4	31.9	28.9	21.5	538.6
100	19.8	44.3	42.3	27.8	24.8	20.1	537.6
200	29.0	39.8	37.8	21.8	18.8	18.0	536.6
250	32.8	38.3	36.3	19.8	16.8	17.3	536.3



**Leviton Network Solutions**  
 2222 - 222nd St. SE  
 Bothell, WA 98021-4416

**Asia / Pacific**  
 T +1.631.812.6228  
 E infoasean@leviton.com

**Canada**  
 T +1.514.954.1840  
 E pcservice@leviton.com

**Caribbean**  
 T +1.954.593.1896  
 E infocaribbean@leviton.com

**China**  
 T +852.2774.9876  
 E infochina@leviton.com

**Colombia**  
 T +57.1.743.6045  
 E infocolombia@leviton.com

tel 1-800-824-3005  
 tel +1-425-486-2222  
 appeng@leviton.com  
 www.leviton.com

**Europe**  
 T +33.6.8869.1380  
 E infoeurope@leviton.com

**India / SAARC**  
 T +971.4.886.4722  
 E infoindia@leviton.com

**Mexico**  
 T +52.55.5082.1040  
 E lsamarketing@leviton.com

**Middle East & Africa**  
 T +971.4.886.4722  
 E lmeinfo@leviton.com

**South Korea**  
 T +82.2.3273.9963  
 E infokorea@leviton.com