


FAST CONNECTOR

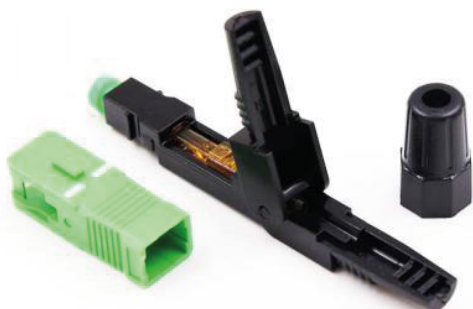

FEATURES

- Pre-terminated fiber in the ferrule, no epoxy, curing and polishing.
- Stable optical performance and reliable environmental performance.
- Cost effective and user friendly, termination time with tripping and cutting tool
- Low cost redesign competitive price
- Thread joints for cable fixing.

APPLICATIONS

- FTTH project
- CATV networks
- PON networks

Specification


Parameters	Specification
Applicable Cable	3.0 x 2.0mm drop cable 3mm, 2mm, 900um round cable (optional)
Fiber Type	SM/MM
Insertion Loss (dB)	≤ 0.3
Return Loss (dB)	≥ 50 (SM UPC) ≥ 55 (SM APC) ≥ 30 (MM)
Tension (N)	40

Durability	≤0.3dB typical change, 1000 times mating
Operating Temperature (°C)	-45 ~ +85

FAST CONNECTOR



Dimension

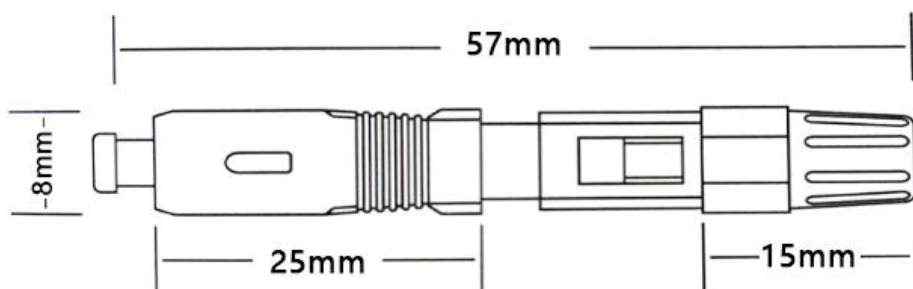

Package

100pcs/Inner box

2000pcs/Outer carton



Order Information

DA-PFC-SC32-SM-A-1

Pre-embedded type, SC/APC; Applicable for 3.0 x 2.0mm drop cable, 3mm,2mm round cable, SM