


TX CABLE FO MM 6F OM4 DUCTO ARMADO
LT LSZH NEGRO GYXTZW-6OM4

STRUCTURE DATA

LSZH Outer Sheath (Black)	Thickness	2 mm
Corrugated Steel Tape	Thickness	0,25 mm
Fiber	No.s	6 cores
Phosphating Steel Wire	No.sxDia.	2×0.8 mm
Jelly		
PBT Tube	Dia.	1.8/1.2 mm
Water blocking tape	Thickness	0,25 mm

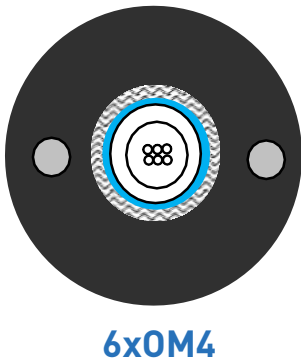

fiber count in one tube	6
Color of Optical fiber	blue, orange, green, brown, slate, white
Color of Loose tube	Natural
Diameter of Optical cable	7.3±0.2 mm
Weight	78±10% kg/km

TECH DATA

Standard:IEC-60794		
Features: Water blocking, Moisture proof, Tensile resistant, Crushing resistant		
Installation: Aerial and duct Application		
Allowable tensile strength	Long term	600 N
	Short term	1500 N
Water ingress resistance		1meter, 24hours, 3samples
Minimun bending radius(Dynamic)		20D
Minimun bending radius(Static)		10D
Life span of Optical cable		≥30 yearst

TEMP.CAPABILITY

-40°C ~ +70°C	Δα≤0.05 dB/km
Note All dimension and data are nominal value	
600T Water blocking glass yarns:3/4	9629 GJFXZY-12 OM4

ORDEN DE PEDIDO

CÓDIGO	DESCRIPCIÓN
P09630	TX CABLE FO MM 6F OM4 DUCTO ARMADO LT LSZH NEGRO GYXTZW-6OM4