


CABLE FIBRA OPTICA TRIMERX
INT/EXT LOOSE TUBE LSZH GJFXZY

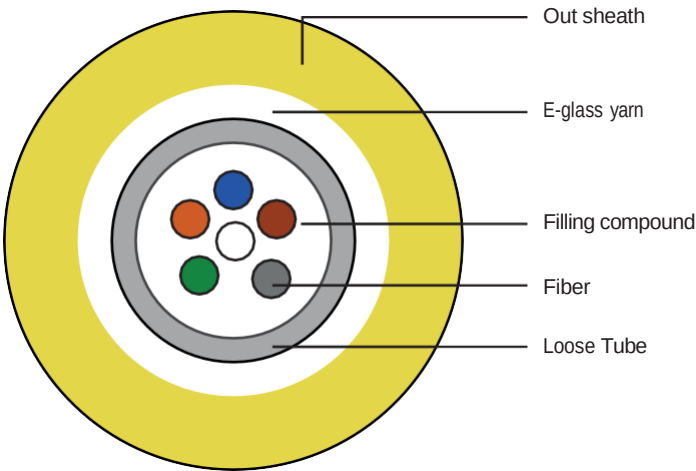

CHARACTERISTICS

- Filler protect tube fiber.
- E-glass member potentiate.
- Fiber Counl:2~12 cores.

APPLICATIONS

- Adopted to indoor or outdoor distribution.
- Small cable size light weight
- With excellent waterproofing performance.

TECHNICAL PARAMETERS

CABLE COUNT	OUT SHEATH DIAMETER (MM)	WEIGHT (KG)	MINIMUM ALLOWED TENSILE STRENGTH (N)		MINIMUM ALLOWABLE CRUSH LOAD (N/100 MM)		MINIMUM BENDING RADIUS (MM)		STORAGE TEMPERATURE (°C)
			SHORT TERM	LONG TERM	SHORT TERM	LONG TERM	SHORT TERM	LONG TERM	
2	6.0	45.00	600	200	1000	200	20D	10D	-20+60
4	6.0	45.00	600	200	1000	200	20D	10D	-20+60
6	6.0	45.00	600	200	1000	200	20D	10D	-20+60
8	6.0	45.00	600	200	1000	200	20D	10D	-20+60
10	6.0	45.00	600	200	1000	200	20D	10D	-20+60
12	6.0	45.00	600	200	1000	200	20D	10D	-20+60

OPTICAL CHARACTERISTICS

FIBER SORT	MULTIMODE	G.651	A1a:50/125	Graded - index fiber
			A1b:62.5/125	
	SINGLEMODE	G.652 (A, B, C, D)		B1.1 Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2: Cut-off wavelength shifted
		G.655		B4: Main Technical data for positive dispersion shifted single mode fiber

ORDEN DE PEDIDO

CÓDIGO	DESCRIPCIÓN
P03171	TX CABLE FO MM 6F OM3 INT/EXT LSZH AQUA GJFXZY
P03172	TX CABLE FO MM 12F OM3 INT/EXT LSZH AQUA GJFXZY
P03121	TX CABLE FO MM 6F INT/EXT LSZH ORANGE GJFXZY
P03361	TX CABLE FO SM 6F INT/EXT AMARILLO LSZH GJFXZY
P14397	TX CABLE FO SM 12F INT/EXT AMARILLO LSZH GJFXZY