

Cable F/UTP Cat. 5e

24 AWG NEGRO 305 MTS EXTERIOR




CÓDIGO
P18432

Reference standard: ANSI/TIA-568-C.2、 ISO / IEC 11801

Rated temperature range:0-60°C

Technical Specifications

Structure	Construction	F/UTP
	Number of pairs	4Pairs
Conductor	AWG	24AWG
	Material	CU
	Conductor dimension (mm)	0.5±0.01
Insulation	Insulation Material	HDPE
	Insulation dimension(mm)	0.99±0.05
Pairs	1	White/Blue(Stripe)&Blue
	2	White/Orange(Stripe)&Orange
	3	White/Green(Stripe)&Green
	4	White/Brown(Stripe)&Brown
Binder	Binder material	NA
Shield	PET film wrapped	Yes
	Al Foil	Yes
	0.45mm CCA	Yes
Outer jacket	Outer jacket material	PE
	Thickness(mm)	0.55±0.1
	Overall dimension(mm)	6.0±0.5
	Outer jacket color	black
	Rip cord	Yes
Packing	305M/wooden tray	
Marking	According to customer requirements	

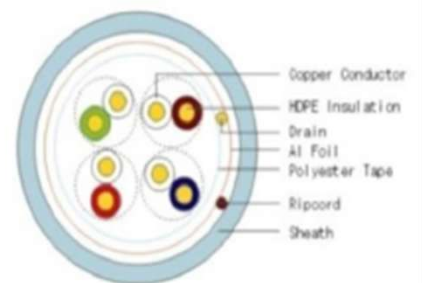

Fluke Test: Pass 90 meters