


TX CABLE FO MM 12F OM2 INT/EXT AQUA 10GB a 150 metros

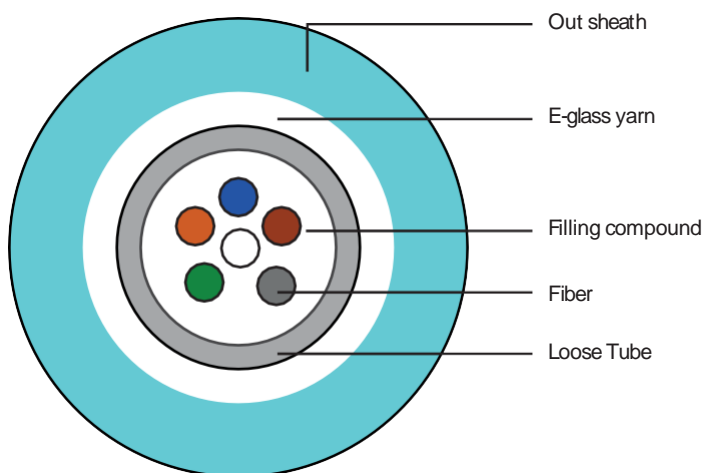

CHARACTERISTICS

- Filler protect tube fiber.
- E-glass member potential e.
- Fiber Count: 2~12 cores.

APPLICATIONS

- Adopted to indoor or outdoor distribution.
- Small cable size light weight
- With excellent waterproofing performance.



TECHNICAL PARAMETERS

CABLE COUNT	OUT SHEATH DIAMETER (MM)	WEIGHT (KG)	MINIMUM ALLOWED TENSILE STRENGTH (N)		MINIMUM ALLOWABLE CRUSH LOAD (N/100 MM)		MINIMUM BENDING RADIUS (MM)		STORAGE TEMPERATURE (°C)
			SHORT TERM	LONG TERM	SHORT TERM	LONG TERM	SHORT TERM	LONG TERM	
2	6.0	45.00	600	200	1000	200	20D	10D	-20+60
4	6.0	45.00	600	200	1000	200	20D	10D	-20+60
6	6.0	45.00	600	200	1000	200	20D	10D	-20+60
8	6.0	45.00	600	200	1000	200	20D	10D	-20+60
10	6.0	45.00	600	200	1000	200	20D	10D	-20+60
12	6.0	45.00	600	200	1000	200	20D	10D	-20+60

OPTICAL CHARACTERISTICS

FIBER SORT	MULTIMODE	G.651	A1a:50/125	Graded - index fiber
	SINGLEMODE	G.652 (A, B, C, D)		B1.1 Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2: Cut-off wavelength shifted
		G.655		B4: Main Technical data for positive dispersion shifted single mode fiber

ORDEN DE PEDIDO

CÓDIGO	DESCRIPCIÓN
P08994	TX CABLE FO MM 12F OM2 INT/EXT AQUA 10GB a 150 metros